



CATALOGUE

AUTOMATIC GATE



**Công ty Cổ phần Thương mại
và Sản xuất Toàn An Khánh**

Văn phòng: Số 4, ngõ 199/2 Hồ Tùng
Mậu, Q. Nam Từ Liêm, Hà Nội

Xưởng SX: KCN Bắc Thăng Long, Đông
Anh, Hà Nội

Liên hệ: 0986.000.285

<http://congxedien.vn/>

THƯ NGỎ

Thay mặt toàn thể công ty CP TM và SX Toàn An Khánh gửi tới quý khách hàng, đối tác, các nhà thầu, đại lý lời chúc sức khỏe và thành công!

Toàn An Khánh (TAK.,JSC) là doanh nghiệp chuyên sản xuất, kinh doanh các sản phẩm Cổng Xếp, Barie tự động cho hệ thống kiểm soát phương tiện (Car-Parking) và hệ thống vào ra

(Access Control). Với thế mạnh về sản xuất, nhiều năm kinh nghiệm và hệ thống đại lý, nhà phân phối khắp cả nước; chúng tôi cam kết mang lại các sản phẩm ĐÚNG chất lượng, ĐÚNG giá và dịch vụ sau bán hàng chu đáo.

TAK.,JSC luôn mong muốn hợp tác với các đối tác là nhà thầu, đơn vị tư vấn – thiết kế, các doanh nghiệp xây dựng công nghiệp, các cá nhân trong và ngoài nước!

Trân trọng cảm ơn!



CỔNG XẾP INOX

TOÀN AN KHÁNH
CATALOGUE



AUTOMATIC STAINLESS STEEL GATE

[illegible]

TAK
AUTOMATION

A long, silver, retractable metal gate system with multiple vertical bars, featuring a control panel with a 'TK' logo and a 'No Parking' sign.

CATALOGUE

AUTOMATIC STAINLESS STEEL GATE



TAK-013



TAK-019



TAK-041



TAK-042A






TAK-043



TAK-044

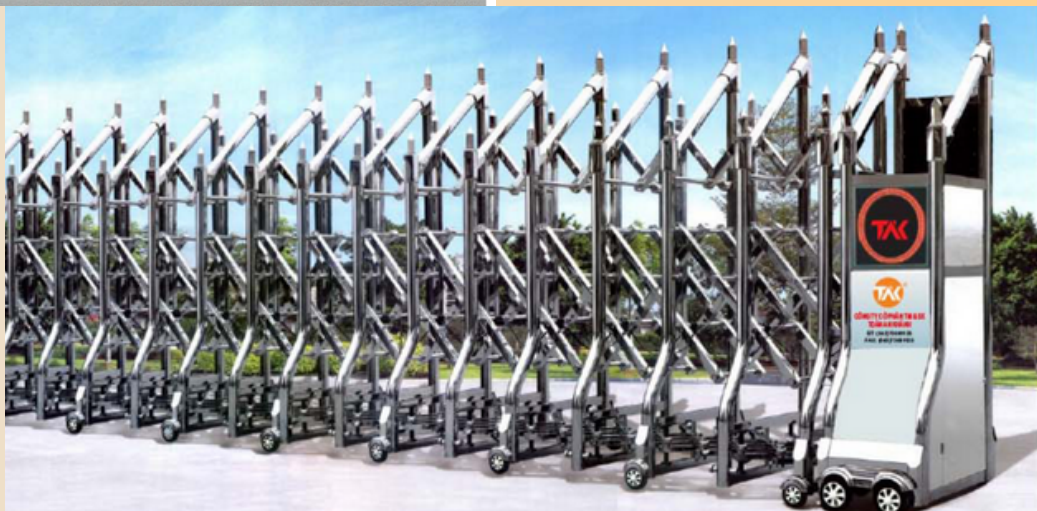

TAK-050



TAK-051



CATALOGUE

AUTOMATIC STAINLESS STEEL GATE



TAK-056



TAK-057

CATALOGUE

AUTOMATIC STAINLESS STEEL GATE



TAK-070



TAK-073



TAK-074




TAK-075




CATALOGUE

AUTOMATIC STAINLESS STEEL GATE

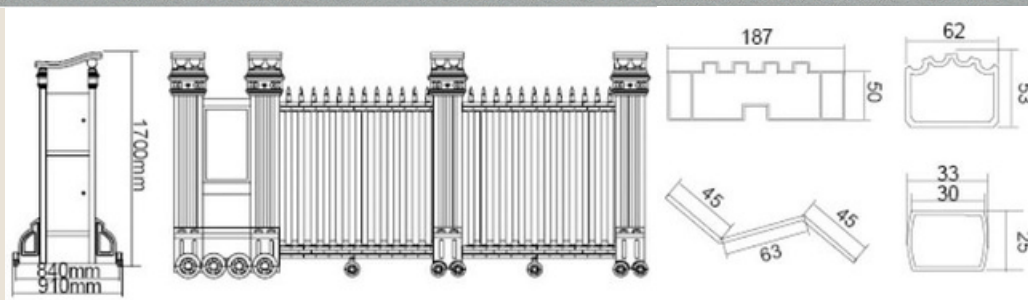


TAK-Y001

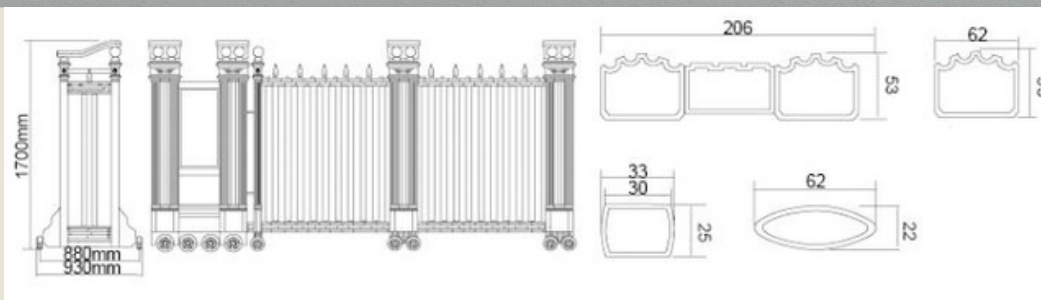


TAK-Y002

CATALOGUE

AUTOMATIC STAINLESS STEEL GATE

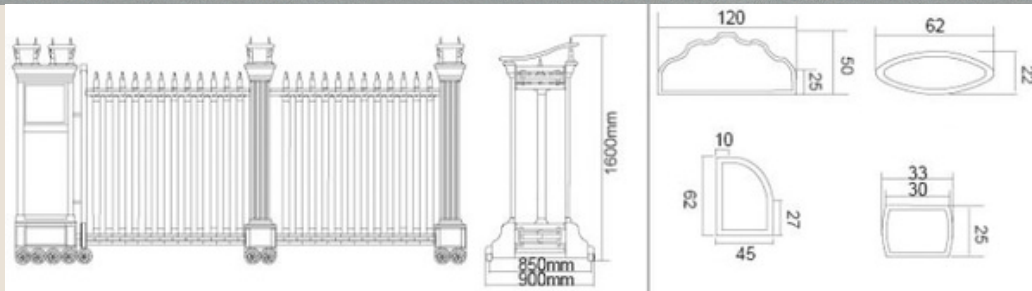



TAK-Y003



0986.000.358
0986.000.285




TAK-Y004

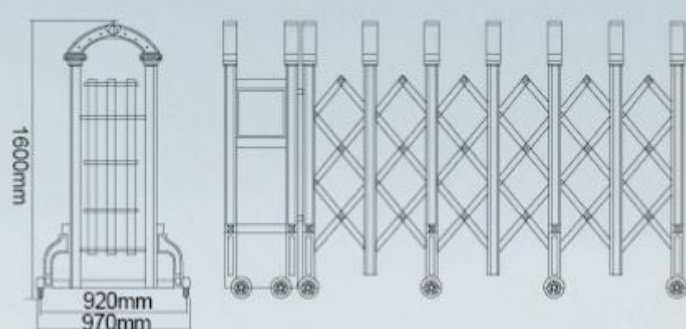


CATALOGUE

AUTOMATIC STAINLESS STEEL GATE




TAK-Y005




TAK-Y006

CATALOGUE




AUTOMATIC STAINLESS STEEL GATE




TAK-Y007






TAK-Y008

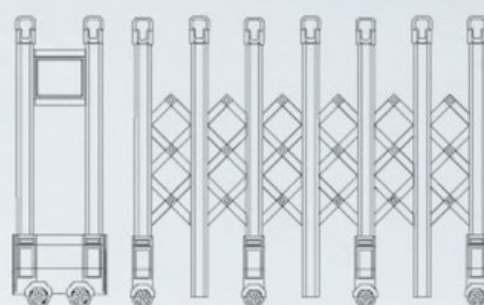





TAK-Y009

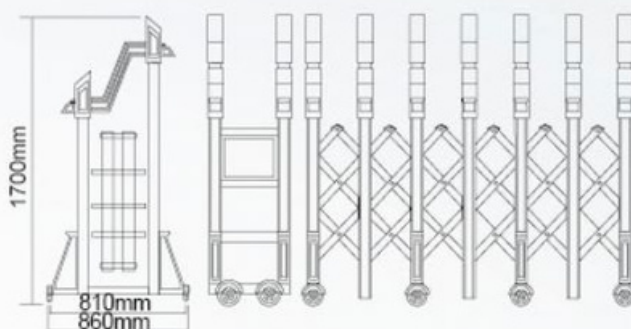


TAK-Y010

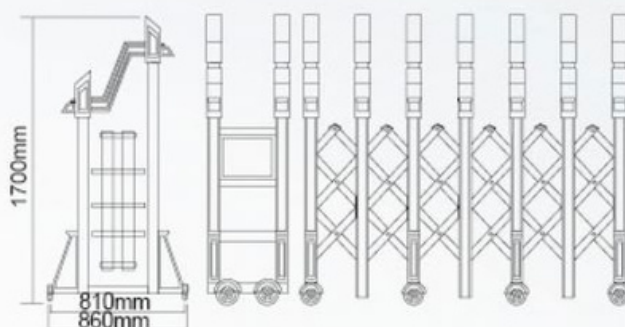




CATALOGUE

AUTOMATIC STAINLESS STEEL GATE




AUTOMATION

TAK-Y011

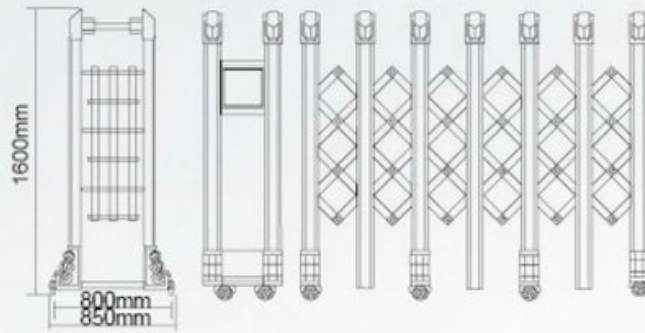

AUTOMATION

TAK-Y012

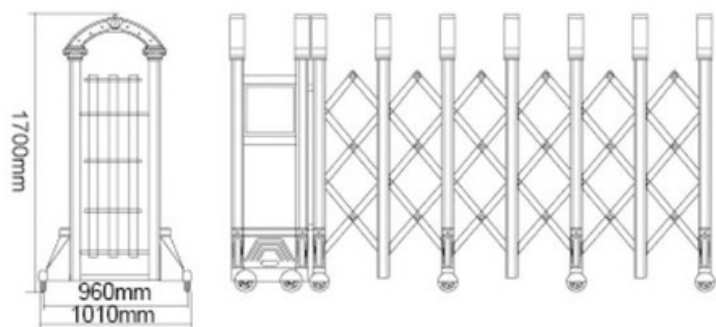

CATALOGUE




AUTOMATIC STAINLESS STEEL GATE



TAK-Y013





TAK-Y014

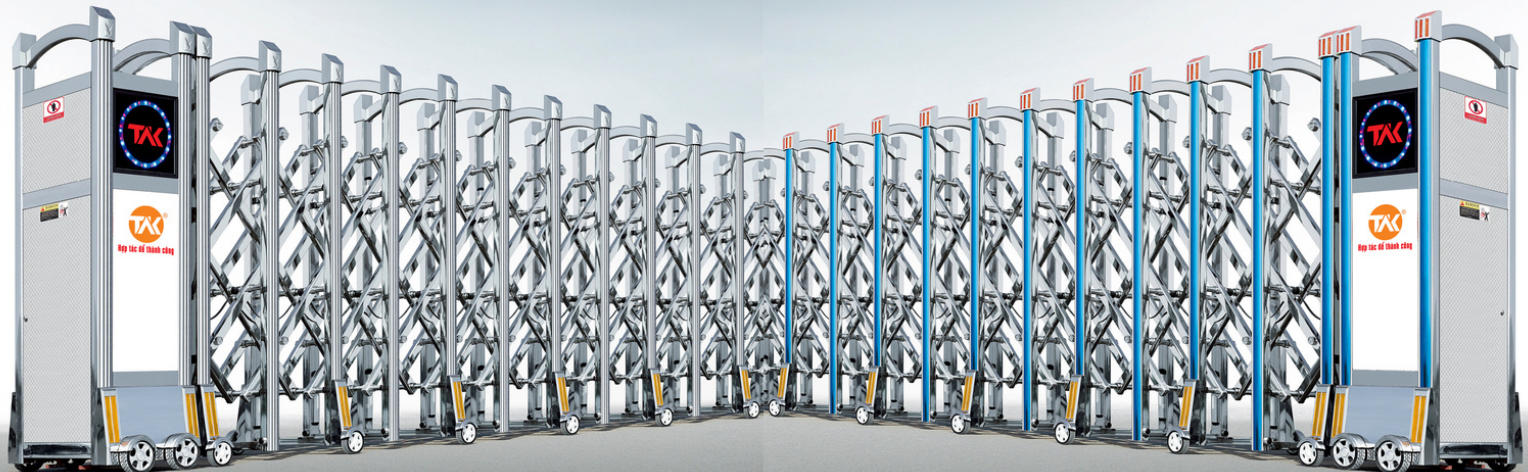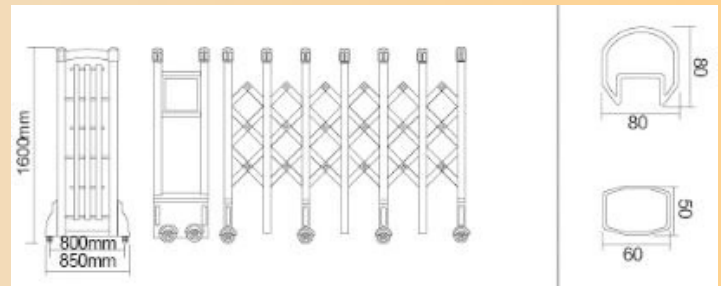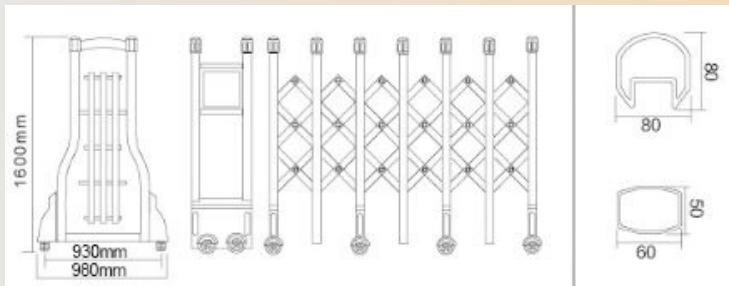

TAK-Y015



TAK-Y016

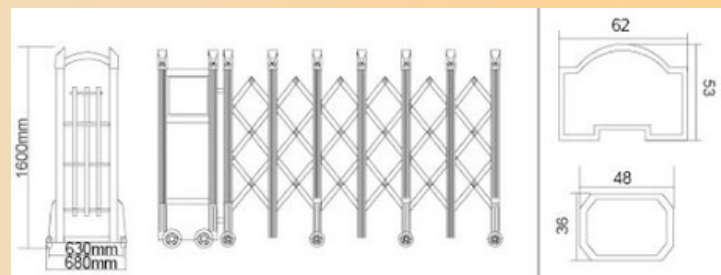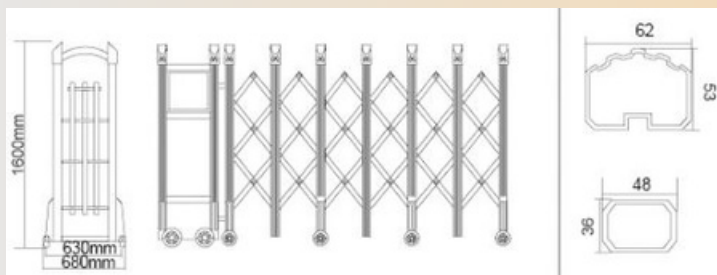

CATALOGUE



AUTOMATIC STAINLESS STEEL GATE



TAK-Y017





TAK-Y018

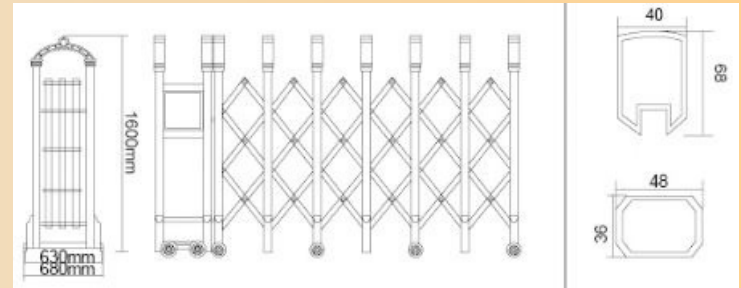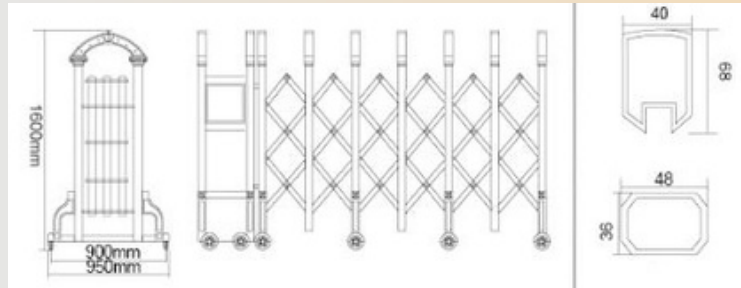

TAK-Y019




TAK-Y020

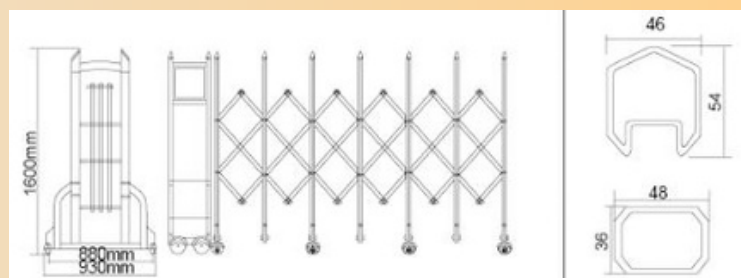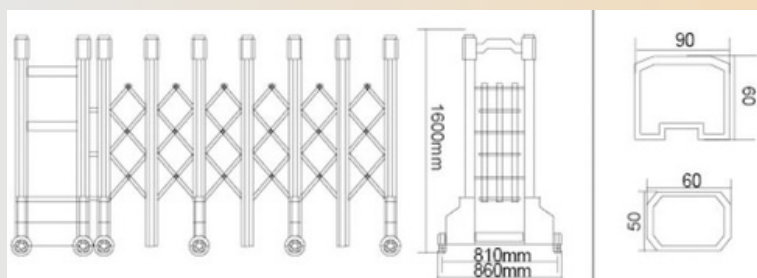

CATALOGUE



AUTOMATIC STAINLESS STEEL GATE

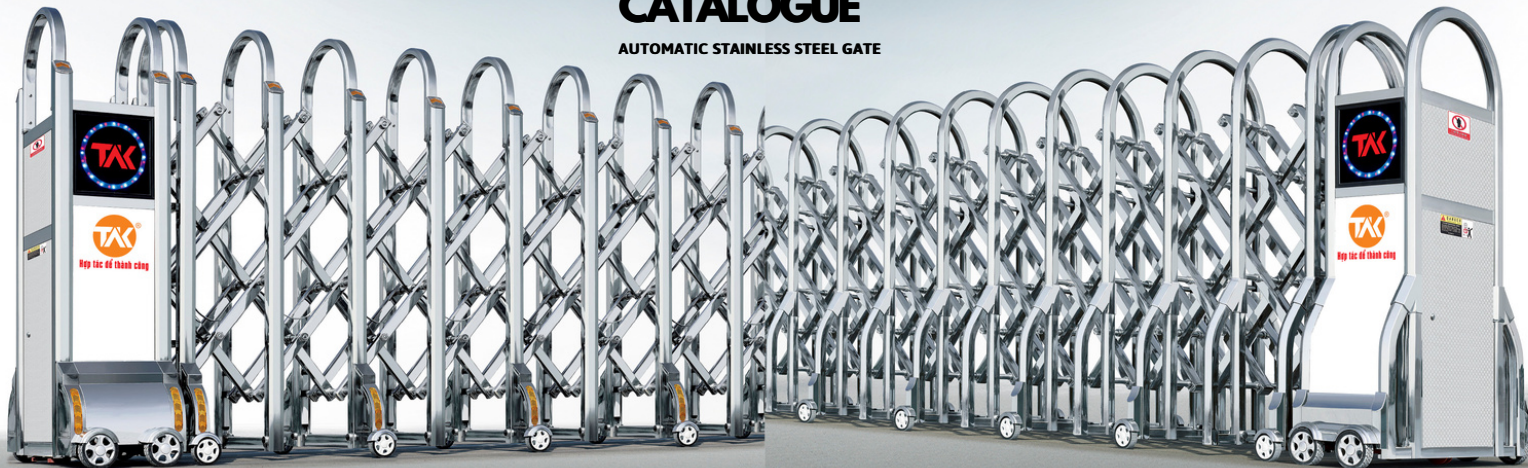

TAK-Y021





TAK-Y022

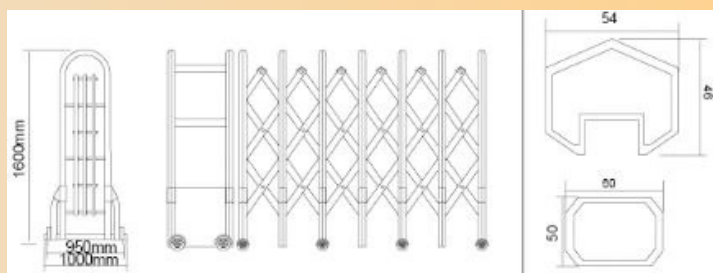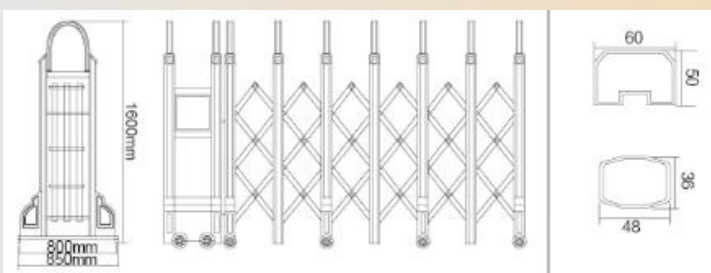

TAK-Y033



TAK-Y034

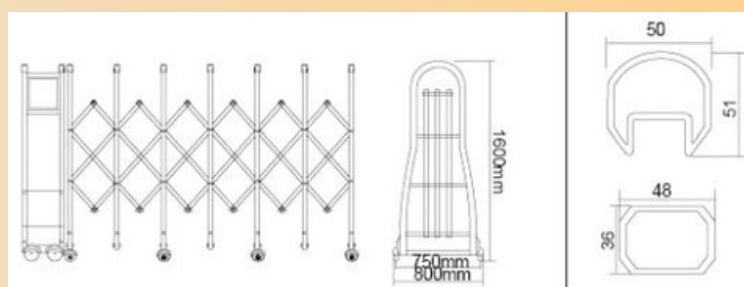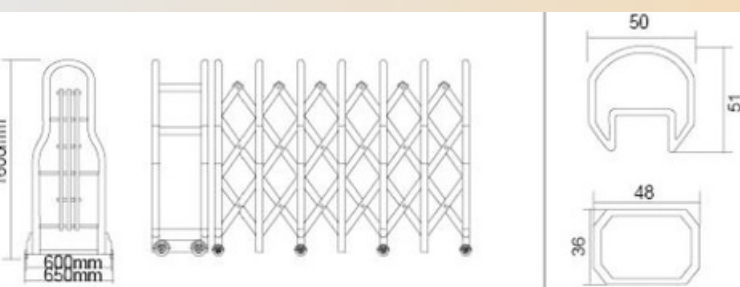



TAK-Y035



CỔNG XẾP HỢP KIM NHÔM

TOÀN AN KHÁNH
CATALOGUE






TAK-N001

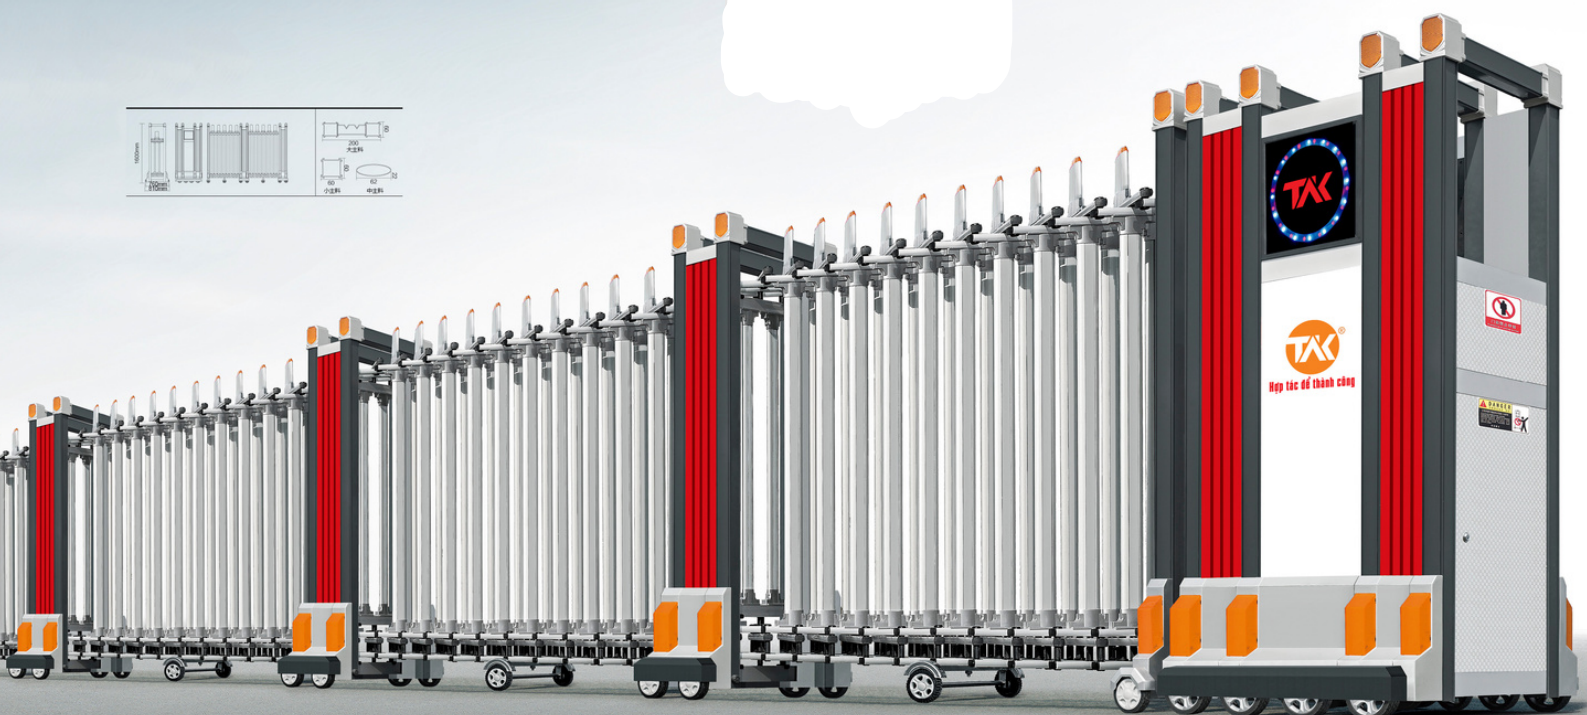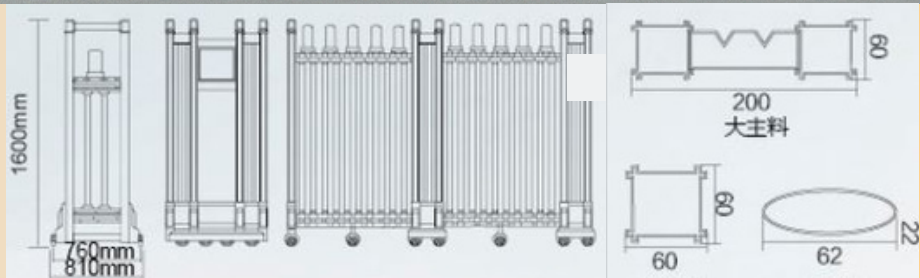



TAK-N002

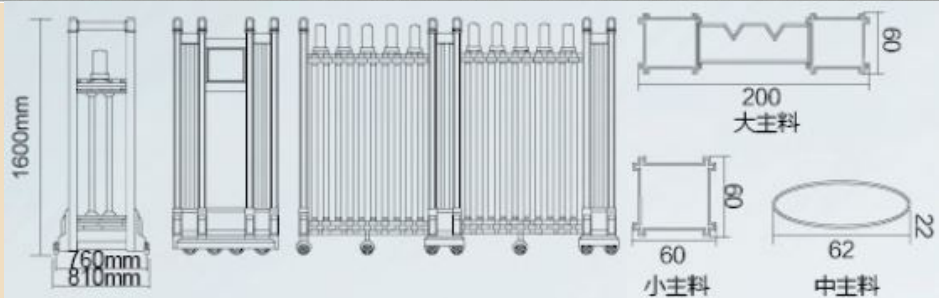




AUTOMATION


TAK-N003

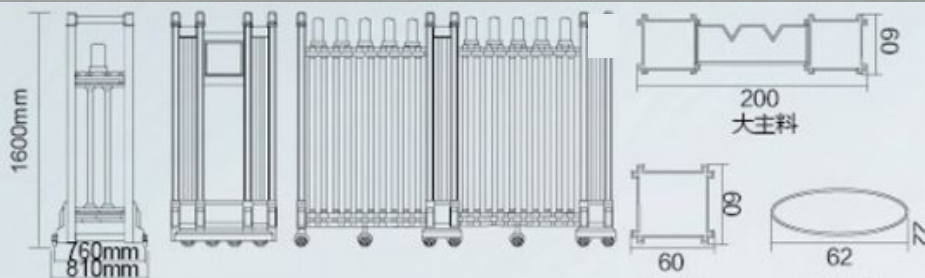


AUTOMATION

TAK-N004

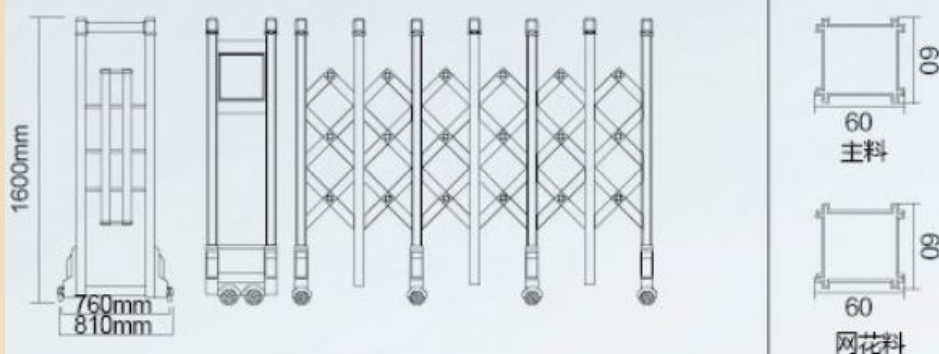


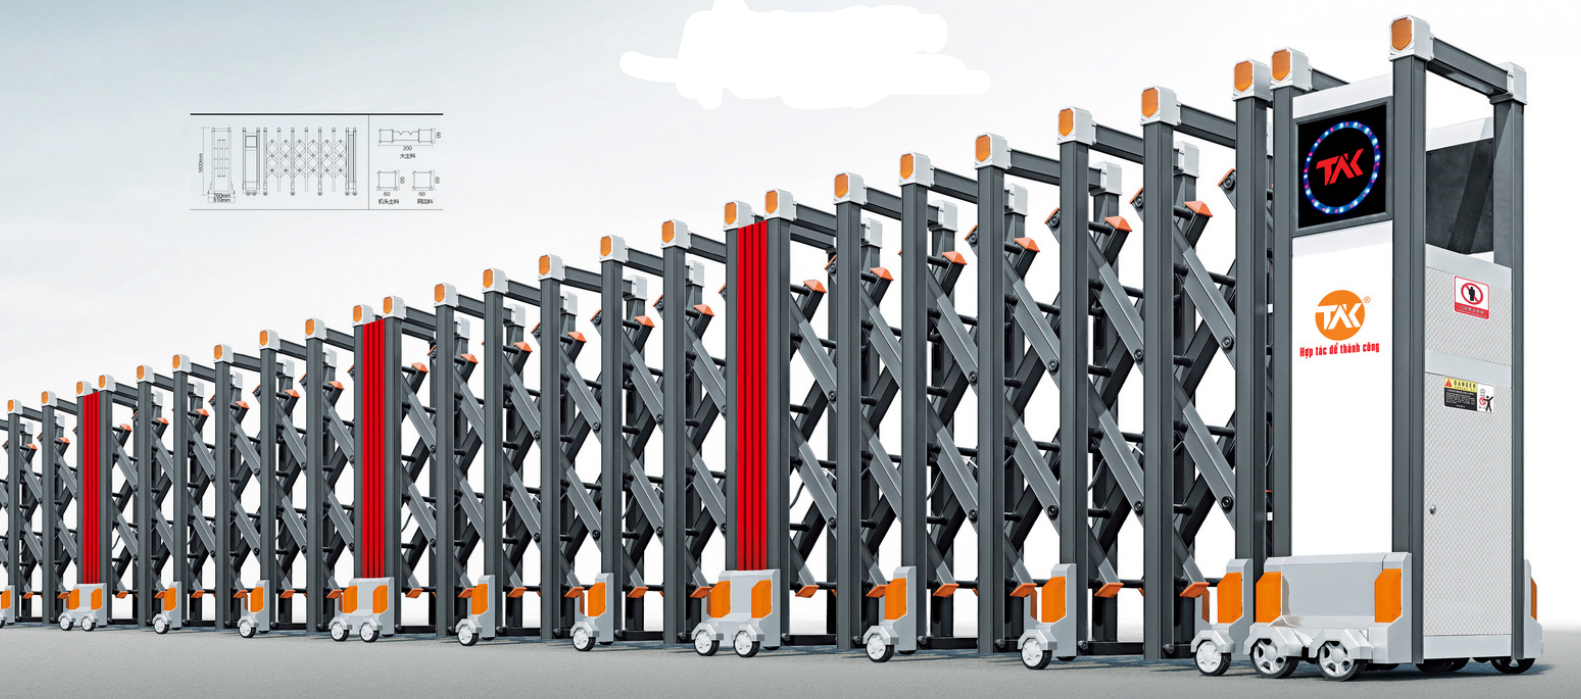


TAK-N005



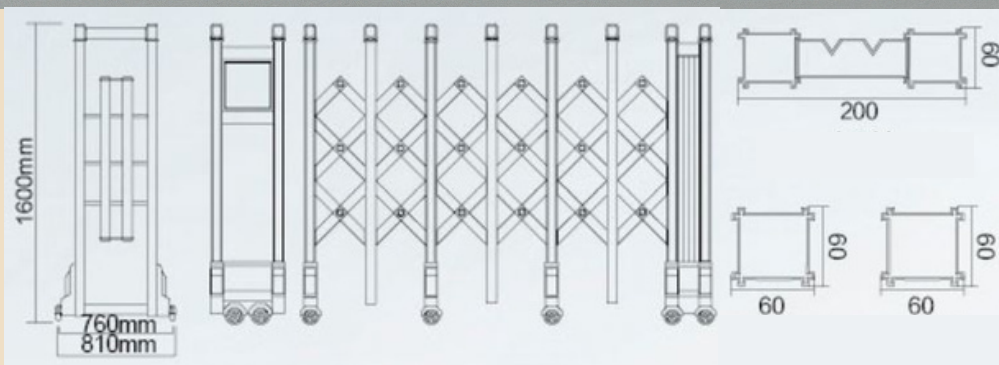


TAK-N006


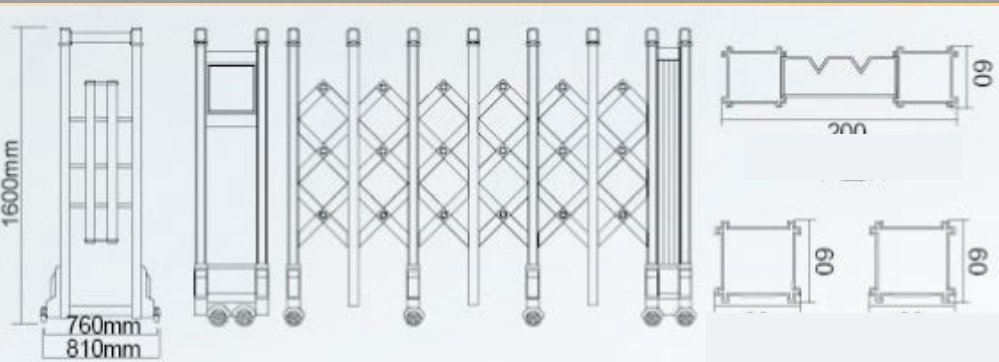





TAK-N007



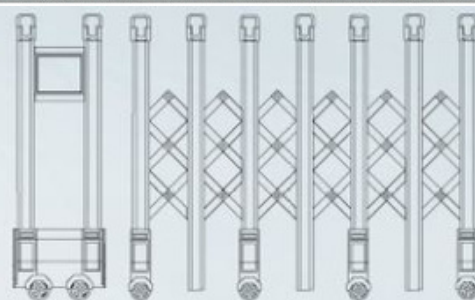



TAK-N008

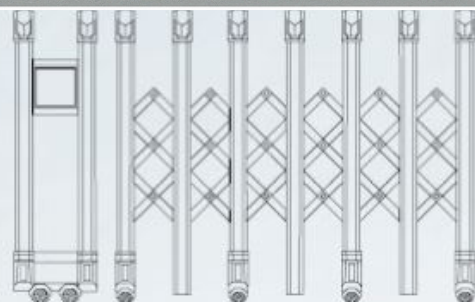





TAK-N009

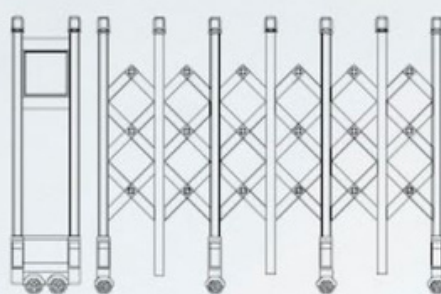

TAK-N010


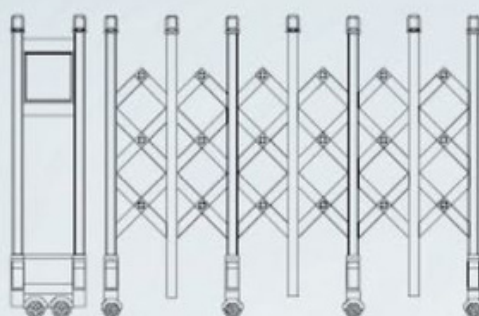





屏障系统 型号规格 Q20-030




TAK-N011




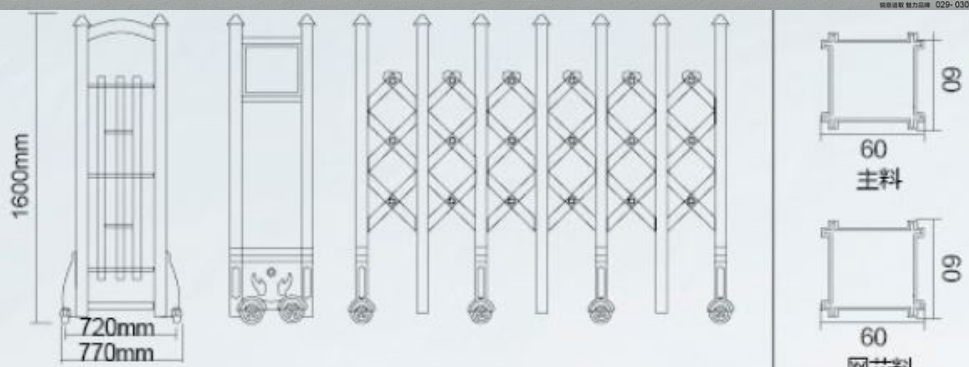


TAK-N012



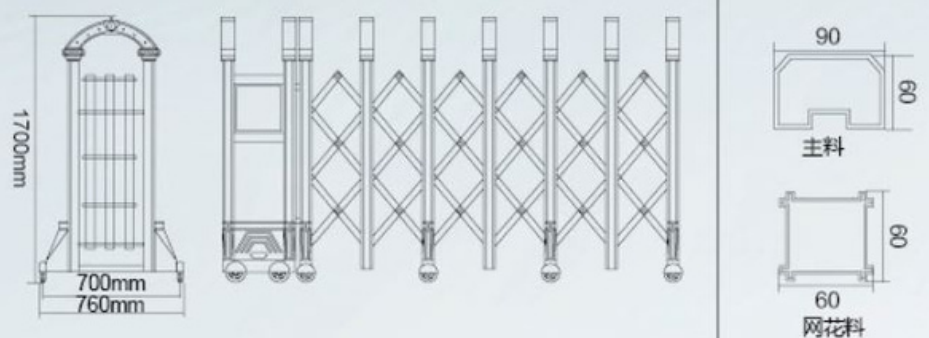




TAK-N013

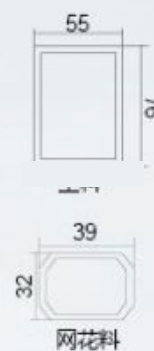
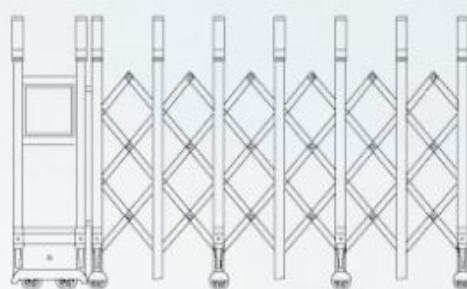



TAK-N014

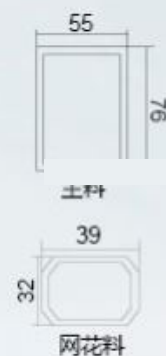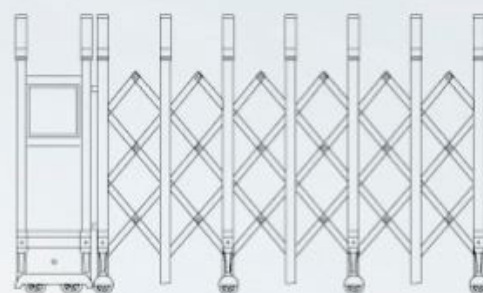






TAK-N015

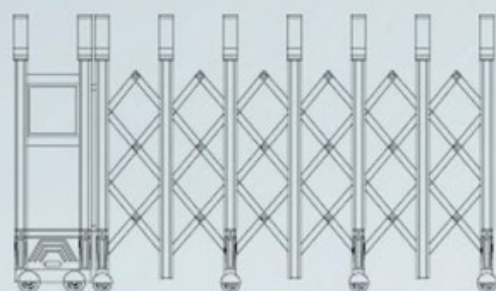



TAK-N016

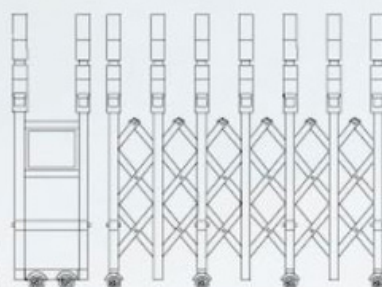



TAK-N017

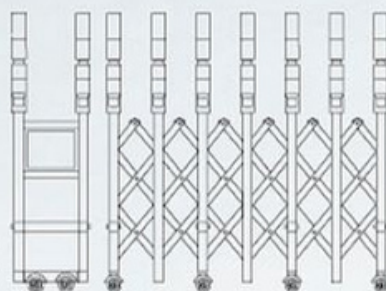



网花料



TAK-N018



TAK-N019

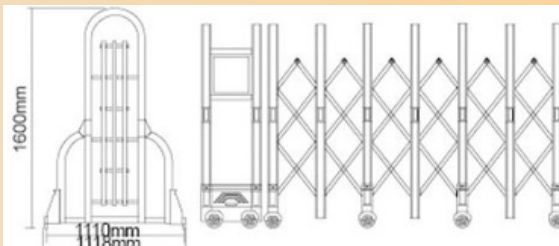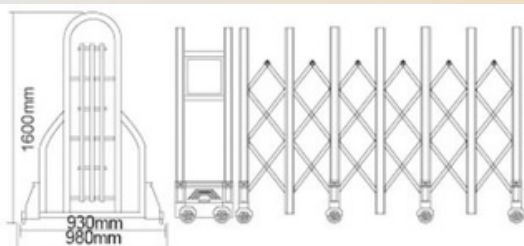

CATALOGUE




AUTOMATIC STAINLESS STEEL GATE



TAK-N020





TAK-N021

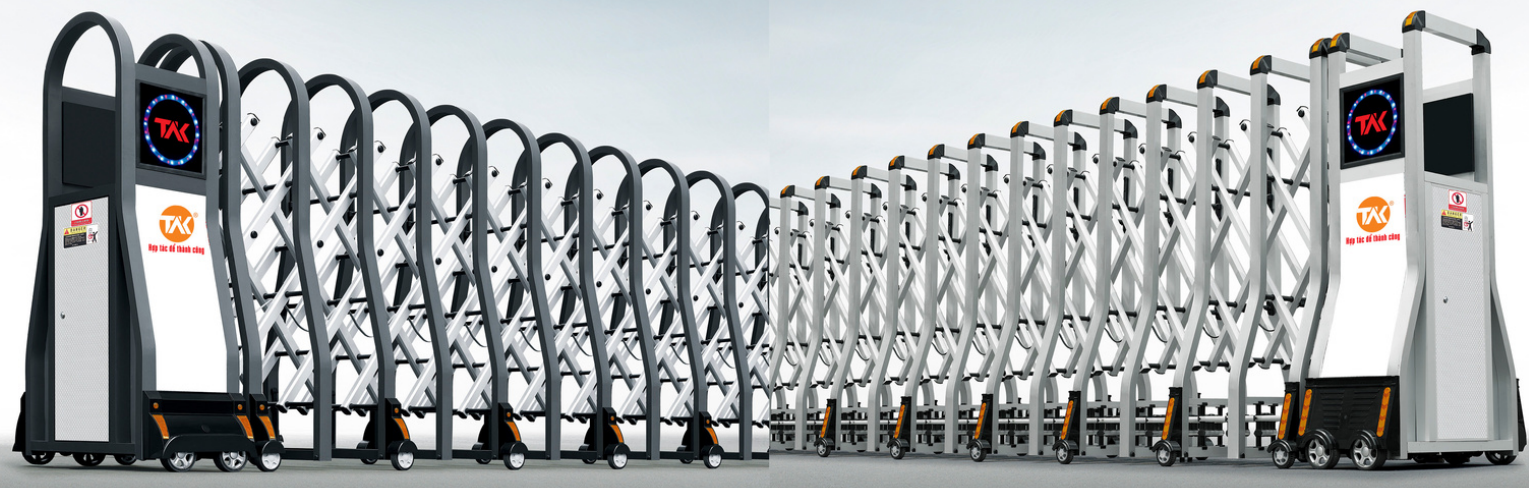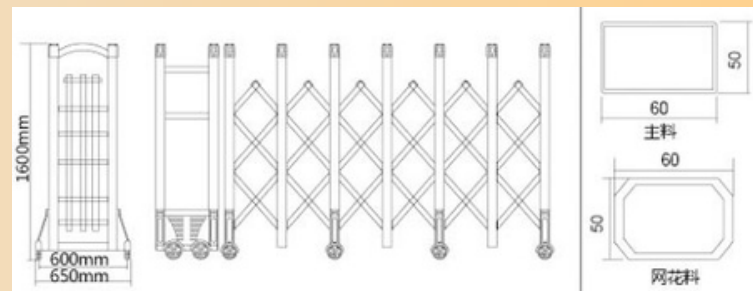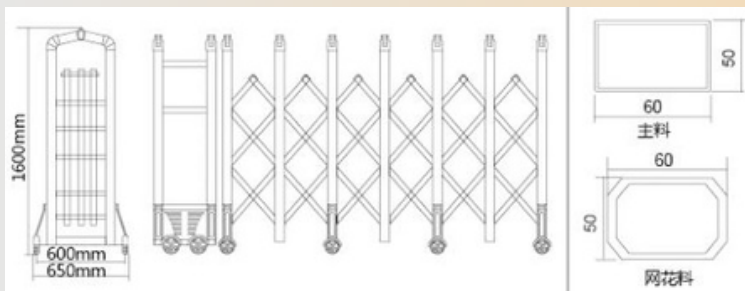

TAK-N022




TAK-N023

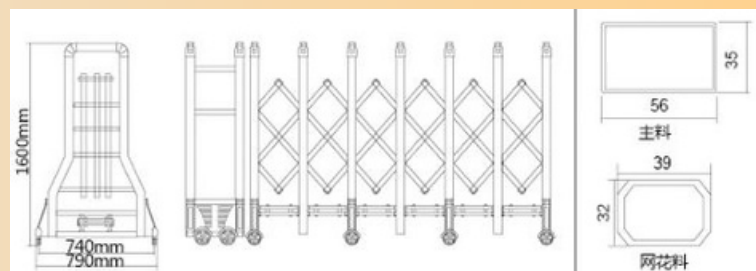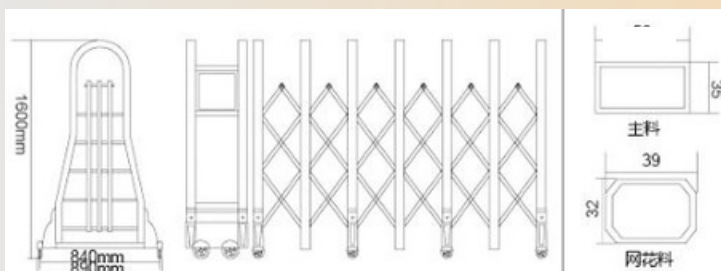

CATALOGUE


AUTOMATIC STAINLESS STEEL GATE

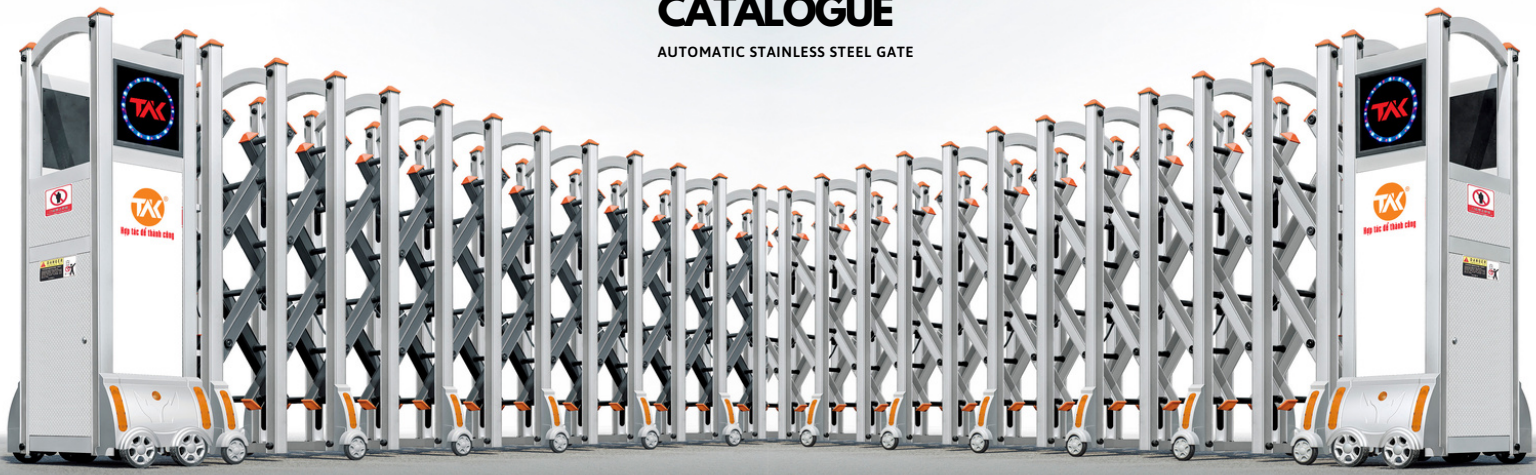

TAK- N024





TAK-N025

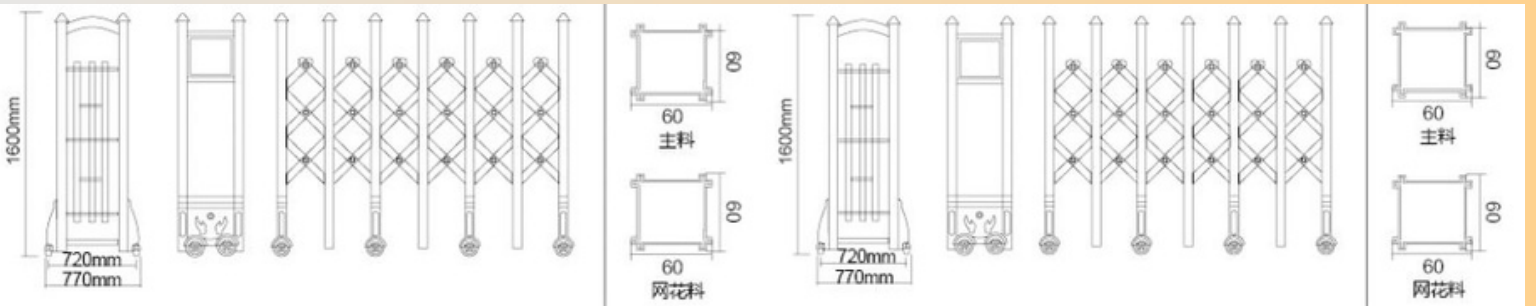

TAK-N026



TAK-N027

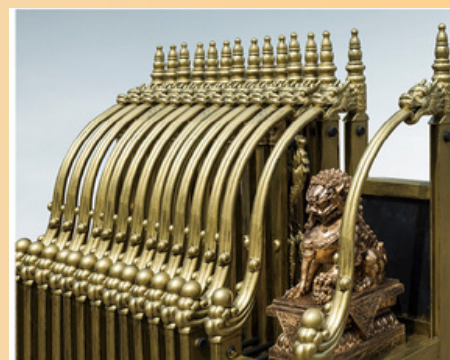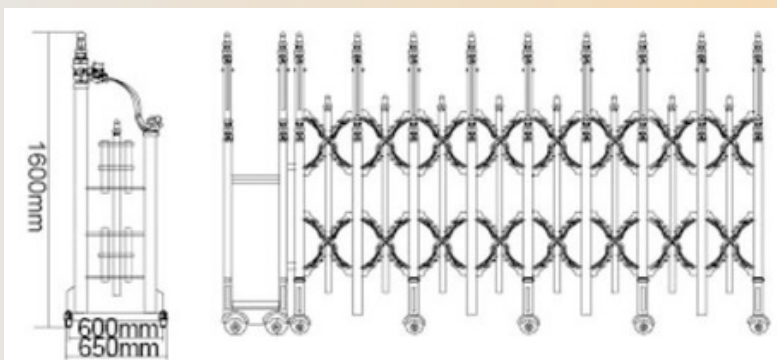




TAK-N028




TAK-N029

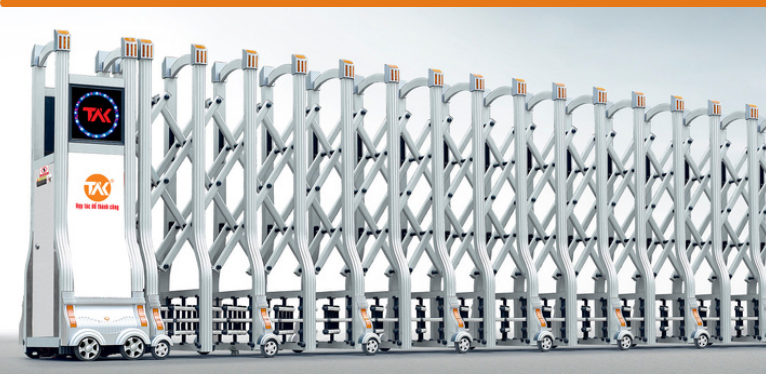

TAK-N030



TAK-N031

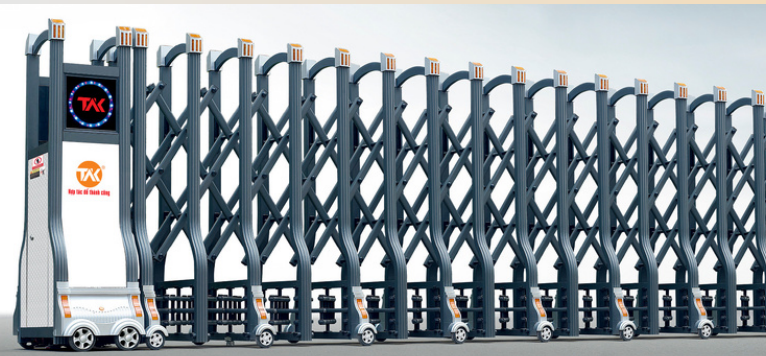

TAK-N032



TAK-N033

CATALOGUE

AUTOMATIC STAINLESS STEEL GATE




AUTOMATION

TAK-N034



AUTOMATION

TAK-N035

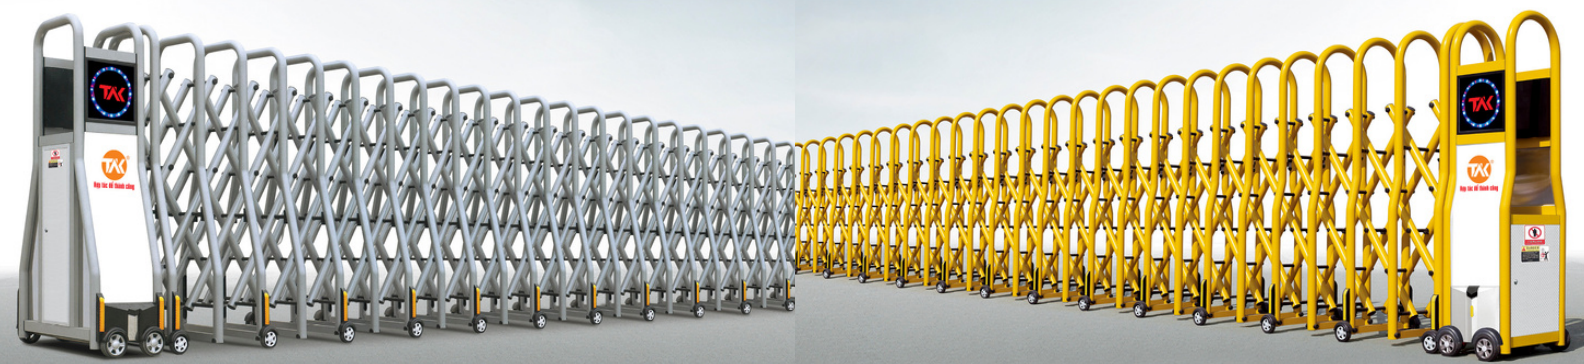

AUTOMATION

TAK-N036



AUTOMATION


TAK-N037



AUTOMATION

TAK-1801

CỔNG TRƯỢT TỰ ĐỘNG

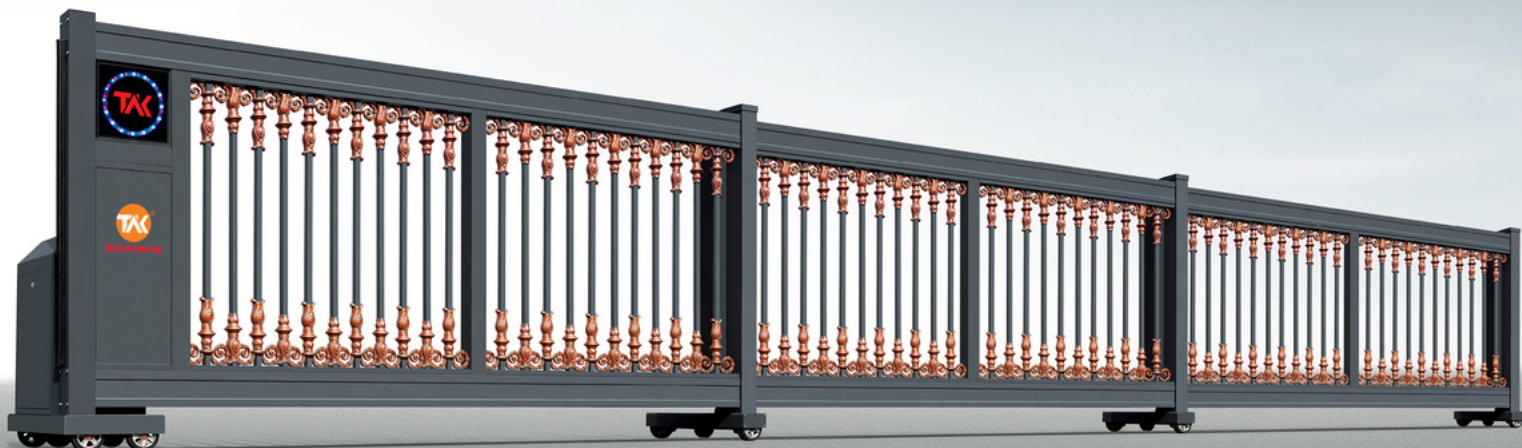

CATALOGUE

AUTOMATIC STAINLESS STEEL GATE



BARIE TỰ ĐỘNG

TOÀN AN KHÁNH
CATALOGUE




BARIE TỰ ĐỘNG CẦN THẲNG

Thông số kỹ thuật

- Quy cách thùng máy: 365W x 265D x 990H (mm)
- Độ cao giữa cần chắn và mặt đất: 830mm
- Nguồn điện: AC 220V/50Hz~ 300 W
- Trọng lượng tịnh thân máy: 50kg
- Chiều dài cần: 1 - 6m
- Tốc độ nâng hạ: 3 - 6s
- Chất liệu: Hợp kim nhôm, sơn tĩnh điện
- Nhiệt độ làm việc: từ -300 ≤ 500
- Động cơ điện bao gồm: 01 hộp điều khiển trung tâm, 01 điều khiển tại phòng bảo vệ, 02 điều khiển cầm tay từ xa.



BARIE TỰ ĐỘNG LƯỚI

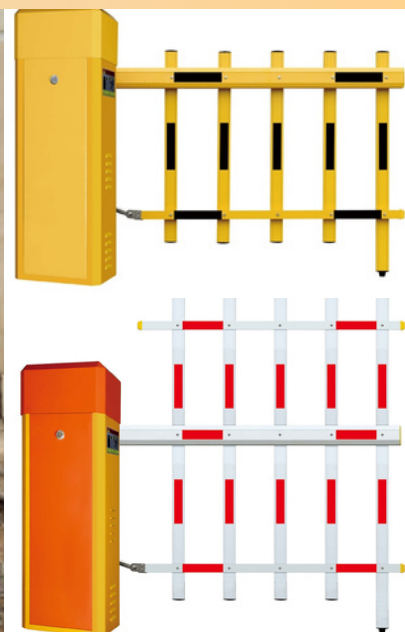

Intelligent lift door series


OSB-SJM01



Intelligent lift door series




Toan An Khanh Commercial and Manufacturing Joint Stock Company

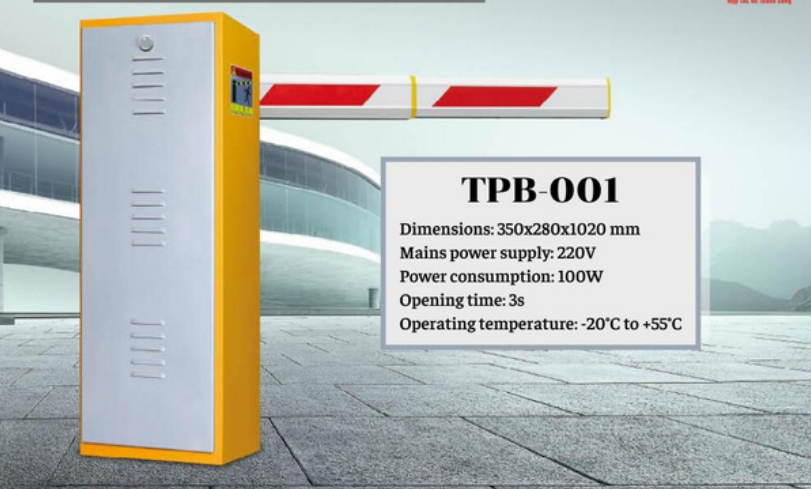


Toan An Khanh Commercial and Manufacturing Joint Stock Company



HOTLINE: 0986.000.285

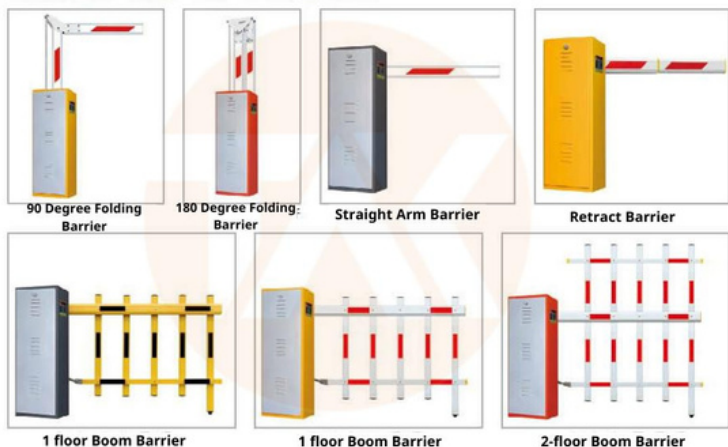

HOTLINE: 0986.000.285

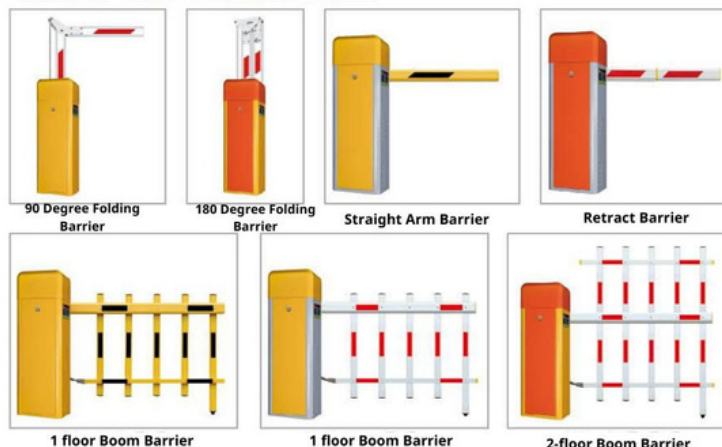



BARIE CASIT (ITALY)





TECHNICAL DATA


Body and frame	Steel frame protected by cataphoresis and painted (RAL)	
Engine	24V with cabling / version 24 V Solar Energy (battery, solar panel) - 1.5 Amp - 250 Watt	
Protection degree	IP 54	
Time switches / opening time	3,5 sec.	
Duty cycle	80%	
Use	Intensive	
Max torque	100 Nm	
Operating temperature	-20°C +70°C	
Weight of operator	55 Kg	
Boom dimension	100 x 40 mm aluminium white RAL 90010	
Boom lenght max.	5 m without skirt	3,5 m with skirt
Emergency release	Yes	
Super fast		



CASIT UFO



24V 24 V DC	A	1020
	B	270
ENERGY SAVING	C	360
	D	5000
SLEEP MODE	D1	3500
	E	860
ENCODER	G	40
	H	100
KIT Kit version	L	290
	M	280
COMPACT DESIGN	P	520
	S	-
	T	3000
	Z	-

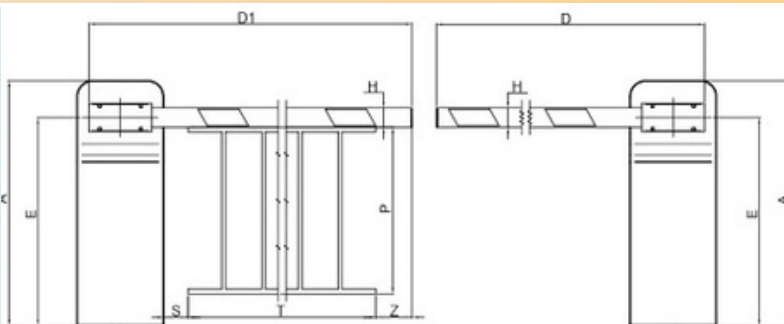

CATALOGUE

AUTOMATIC SOLUTIONS




CASIT PARKY



24V 24 V DC	A	1100
	B	235
ENERGY SAVING	C	305
	D	5000
SLEEP MODE	D1	3500
	E	860
ENCODER	H	80
	L	250
KIT Kit version	M	520
	P	--
COMPACT DESIGN	S	--
	T	3000
	Z	--


TECHNICAL DATA

Body and frame	Steel frame protected by cataphoresis and painted (RAL)
Engine	24 V dc - 1,8 A - 60 W - 1,8 Amp - 50/60 Hz
Protection degree	IP 54
Time switches / opening time	3,5 sec. - 6 sec.
Duty cycle	80%
Use	Intensive
Max torque	100 Nm
Operating temperature	-20°C +70°C
Weight of operator	40 Kg
Boom dimension	Aluminum tube d. 80 sp 1.5
Boom lenght max.	5 m without skirt / m 3,5 with skirt
Emergency release	Yes

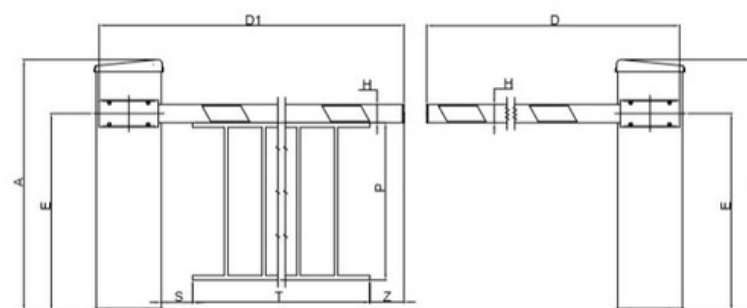

CATALOGUE

AUTOMATIC SOLUTIONS

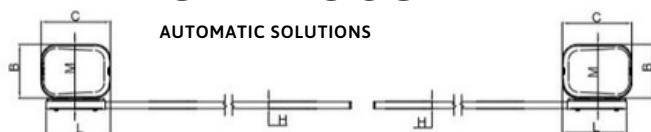

CASIT BV94 / BIV94



CATALOGUE

AUTOMATIC SOLUTIONS

TECHNICAL DATA

Body and frame	Steel frame protected by cataphoresys and painted (RAL) Stainless Steel	
Engine	230 V a.c. - single phase - 50/60 Hz - 1,58 Amp - 250 W	
Protection degree	IP 54	
Time switches / opening time	3,5 sec.	1,5 sec.
Duty cycle	-80%	
Use	Intensive	
Max torque	70 Nm	40 Nm
Operating temperature	-20°C +70°C	
Weight of operator	50 Kg	
Boom dimension	Aluminium 80 x 20 x 1,2	
Boom lenght max.	3 m	2 m
Emergency release	Yes	
Super fast	Yes	Yes


CASIT BG94



	A	1120
ENERGY SAVING	B	320
	C	490
	D	8000
	D1	6000
SLEEP MODE	E	860
	G	40
	H	80
	L	345
	M	380
	P	520
VANDAL-PROOF VERSION	S	-
	T	5000
	Z	-

TECHNICAL DATA

Body and frame	Steel frame protected by cataphoresys and painted (RAL)
Engine	230V a.c. - single phase - 50/60 Hz - 250 W - 1,2 Amp
Protection degree	IP 54
Time switches / opening time	12 sec.
Duty cycle	80%
Use	Intensive
Max torque	70 Nm
Operating temperature	-20°C +70°C
Weight of operator	80 Kg (without boom)
Boom dimension	80 x 40 x 1,5
Boom lenght max.	8 m without skirt / 6 m with skirt (rectangular type)
Emergency release	Yes

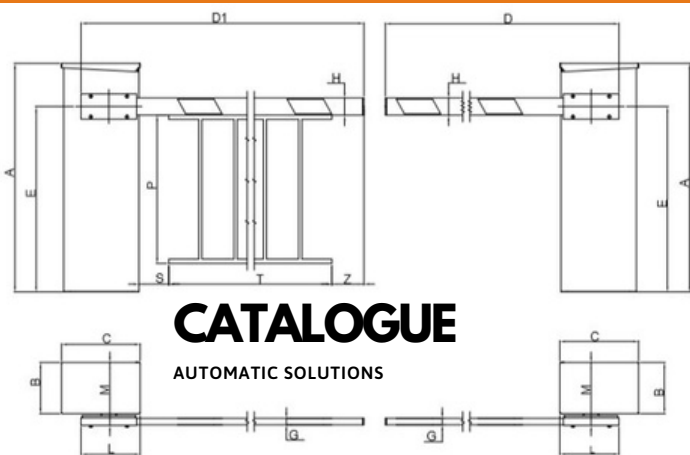

CATALOGUE

AUTOMATIC SOLUTIONS



AUTOMATION

CASIT BM94



ENERGY SAVING




SLEEP MODE



VANDAL-PROOF VERSION

A	1120
B	320
C	490
D	8000
D1	6000
E	860
G	40
H	80
L	345
M	380
P	520
S	-
T	5000
Z	-

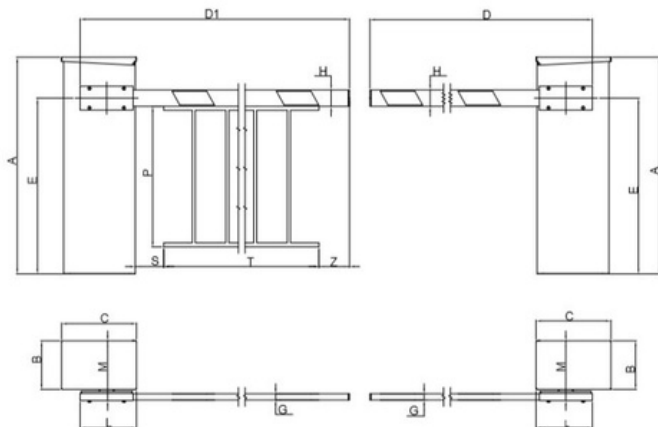

TECHNICAL DATA

Body and frame

Engine

Protection degree

Time switches / opening time

Duty cycle

Use

Max torque

Operating temperature

Weight of operator

Boom dimension

Boom lenght max.

Emergency release

Super fast

Steel frame protected by cataphoresis and painted (RAL)

230 V a.c. - single phase - 50/60 Hz - 1,58 Amp - 250 W

IP 54

5 sec. - 8 sec.

80%

Intensive

280 Nm

-20°C +70°C

50 Kg

80 x 40 x 1,5

6 m without skirt / 4,5 m with skirt

Yes



AUTOMATION

BARIE SOMFY FRANCE



Levixio 230 V



Accessories





Somfy - Levixo 40/60 RTS

Thông số kỹ thuật

- Nguồn cung cấp: 230V, Điện áp mô tơ: 24V
- Công suất tiêu thụ tối đa: 300W
- Số lần đóng mở tối đa/ ngày: 2000 lần (85 lượt/giờ)
- Thời gian đóng mở: Levixo 40 (2.5s đến 6s), Levixo 60 (3s đến 9s)
- Tần số sóng RTS: 433.42 MHz
- Số lượng tối đa điều khiển được sử dụng: 36
- Khả năng chống chịu: IP54
- Nhiệt độ hoạt động: -20°C đến +55°C
- Thanh chắn tối đa: Levixo 40 (4m), Levixo 60 (6m)



Somfy - Levixo 30/50 RTS

Thông số kỹ thuật:

- Quy cách máy (DxRXC): 320*220*1000
- Công suất tối đa: 300W
- Thời gian cần dựng và hạ (s): 8
- Nhiệt độ làm việc: -10 đến ≤ 50 độ C
- 1 motor, 1 board điều khiển
- 2 remote chống nước, chống va đập, thời lượng pin 2 năm.
- Tính năng điều khiển qua Smart-phone tương thích với HĐH IOS và Android.



Trường Quốc tế Gateway



Bưu điện Mỹ Hào



Bệnh viện Dã chiến Mê Linh



TT Phát thanh và truyền hình QĐVN



KCN Yên Phong, Bắc Ninh



Sở Tư Pháp tỉnh Phú Thọ



Ngân hàng Chính sách & XH, Thái Bình



Nhà máy K.Eihin, Việt Trì, Phú Thọ



Công ty Bất động sản Danh Khôi, HCM



Sân bay Nội Bài



Công ty Cổ phần Đông Á



Nhà máy Dong Yang, Mỹ Hào, Hưng Yên




48 Building Trần Bình Trọng, HCM



Phú Thái, Cẩm Phả



Cty TNHH Quốc tế Cerie, Vĩnh Phúc

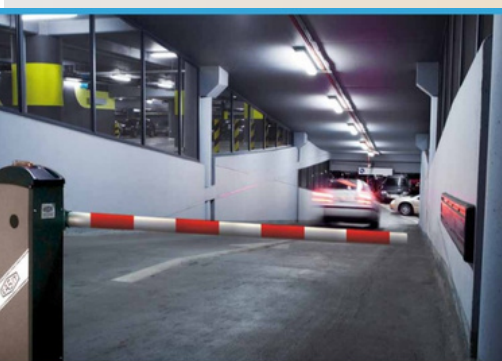

Chung cư cao cấp tại Nha Trang



Nhà máy LG Việt Nam



Công ty Huỳnh Gia, Bình Dương



Xuân Mộc, Vũng Tàu



Bệnh viện quốc tế HCM



Công an Thành phố Tam Điệp



Đại học Thành Đô, Hà Nội



Thành phố Hồ Chí Minh



64 Nguyễn Chí Thanh, Hà Nội



Tòa nhà Vinahud, Minh Khai, Hà Nội



Công ty Waytex, Bình Dương



Khu đô thị An Phú



Công ty KCC, KCN Nhơn Trạch



Nhà máy Prime Vĩnh Phúc



Nhà máy oto MITSUBISHI Bình Dương

Contact us

Công ty Cổ phần Thương mại và Sản xuất Toàn An Khánh

ĐỊA CHỈ

Văn phòng: Số 4, ngõ 199/2 Hồ Tùng Mậu, Q. Nam Từ Liêm, Hà Nội
Xưởng SX: KCN Bắc Thăng Long, Đông Anh, Hà Nội

LIÊN HỆ

0986.000.285
0986.000.528

WEBSITE

<http://congxeptdien.vn/>
<http://toanankhanh.com.vn/>