

• MODERNIZATION SPEED GATE

TAK329



Technical Parameter

Power supply	AC110-220V / 50-60Hz
Motor power consumption	24V BLDC 50W
Passage width	≤1200mm
Arm Length	≤600mm
Open/Close time	1s
Passing speed	40-60 Persons/min
Infrared	4 Paris
Dimension	1200*120*990mm
Housing material	SUS304 Stainless steel
Working temperature	-25° to 75°
Arm Turning	Bi-Direction
Working environment	Indoors or Outdoors
Communication interface	RS485, TTL232


Main Function

- Self-diagnosis function.
- Bi-directional arm turning.
- In case of power failure, the arm opens automatically; upon power restoration, the arm automatically locks.
- After a valid card is read and the passenger passes through, the arm can delay closing for 1-60 seconds, adjustable via the control panel.
- Auto-reset function: If a passenger does not pass within the set time after card reading, the turnstile automatically cancels the order. Managers can adjust this time.
- Anti-tailgating function: If no valid entry signal is received, the arm remains locked.
- Stable operation with minimal noise.

Dimension

- Passage width default is 600mm

Single Channel

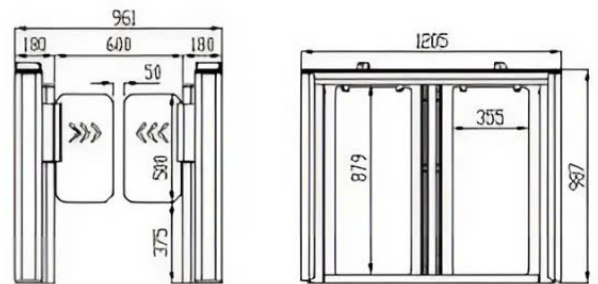

Double Channel

