



Hợp tác để thành công

CÔNG TY CỔ PHẦN THƯƠNG MẠI VÀ SẢN XUẤT TOÀN AN KHÁNH

Số 4, ngách 2, ngõ 199 Hồ Tùng Mậu, Cầu Diễn, Nam Từ Liêm, Hà Nội

Tel: 024 3227 2296

Email: contact@toanankhanh.com.vn, Web: www.toanankhanh.com.vn



Advertising Barrier Gate TAK-D206


Parameters:

Power supply	220V±10%/50HZ,60HZ
Motor power	DC24V,150W
Temperature	-30~80°C
LED strip power supply	DC12V, 14A
LED screen power supply	DC5V, 40A
Advertising LED Screen Dimension	1488x409mm
Advertising LED Box Dimension	440*920mm
Remote Control Distance	<=30m
Opening and Closing Time	3s~6s
Boom Length	Fixed length 2.7m, extended boom length 130-700mm adjustable
Housing Dimension	450*331*1180mm


Features:

- Direction and speed are adjustable.
- Advertising barrier's house is durable and water-proof, so it can be used outdoor.
- Adopt Photosensitive sensor control to control LED light, more intelligent.
- Adopt multiple protective measures (like anti-wind, preventing motor overheat, Anti-surge, Thunder-proof and so on), which increase barrier's safety and reliability.
- Multiplex control way is provided for user: push button, remote controller, long range reader etc.
- Add loop sensor, following functions can be realized: auto close, auto bounce up etc. It can automatically close gate and perfect preventing smashing car.
- Opening first function, it can highly increase access rate.
- System adopts standard electric interface which can connect with other system easily

Housing Dimension

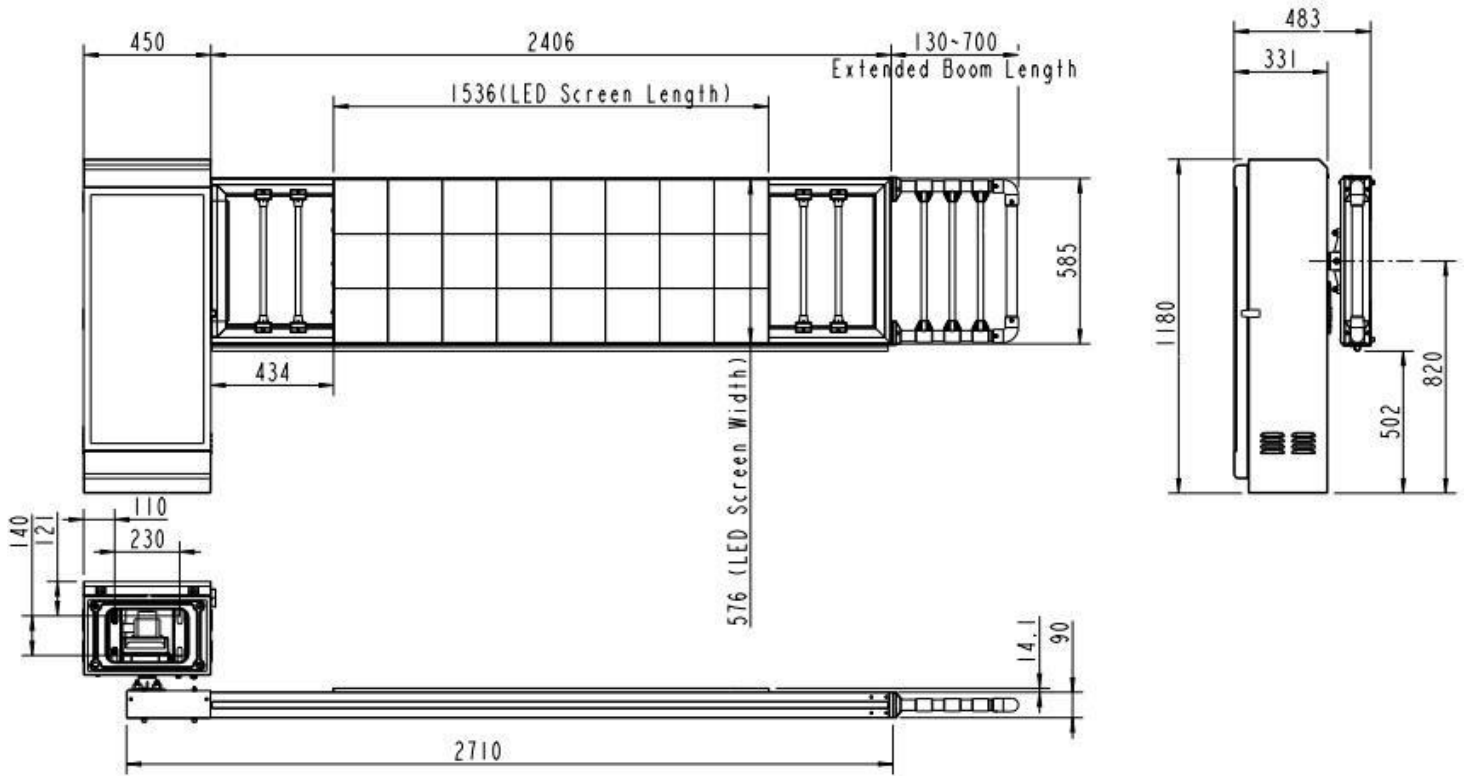

Barrier Direction:

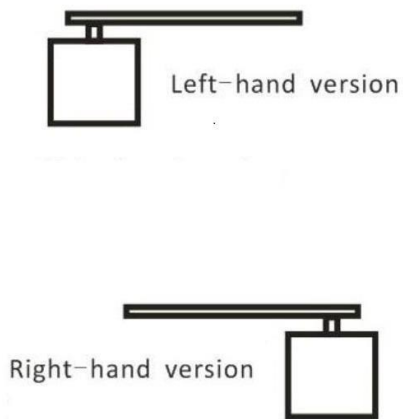

Machine core structure:

